

Pomez ST[®]24/48 Hours
DispatchedClassic
Warranty

Description

Shower tray with a new texture blending natural stone and slate

Range of measurements

- Width: From 70 cm to 100 cm
- Length: From 80 cm to 200 cm
- Height: 3 cm

Materials

- 90mm polypropylene siphon valve with horizontal or vertical drainage
- Made of resin with mineral loads of various granulometries and ISO-NPG gelcoat coating.
- Made with 80% natural materials.
- Manufactured with graphene microparticles and volcanic mineral fillers (Nanotech[®]).


Features

- Possibility of manufacturing in a wide range of colours.
- Mass of the same color as the coating.
- Possibility of multiple waste covers options (See technical catalog).
- Weight reduction of up to 40% and increased resistance to impacts and scratches (Nanotech[®]).


Storage and installation

- Adhesion with polyurethane sealant such as Sikaflex 11FC is important.
- If storing the product, it should always be stored horizontally, never vertically or lying on its side.
- For cutting, it is recommended to use a continuous rim diamond blade.

Sizes / Waste location / Weights / Wastes / Cutting types

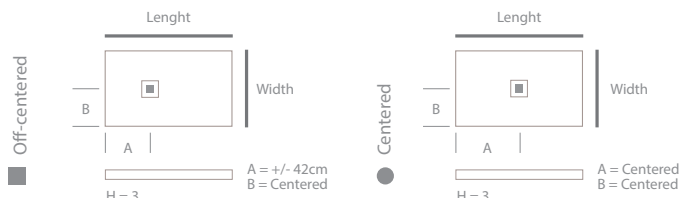


Standard Waste



WASTE COVER SIZE

OPTIMAL WASTE COVERS (SEE CATALOGUE)



Lenght	Width	∞	90
100	Pomez	31 Kg	
120	Pomez	33 Kg	37 Kg
140	Pomez	38 Kg	43 Kg
160	Pomez	44 Kg	49 Kg
180	Pomez	49 Kg	55 Kg

Lightweight (Nanotech[®])

Tests

Product in compliance with the European Standard UNE-EN 14527, having passed all specified tests, and obtained the CE marking.

APPLICABLE TEST	STANDARD	RESULT
Cleanability: surface appearance	UNE-EN 14527:2006+A1:2010 apt.5.2.1	✓
Water drainage	UNE-EN 14527:2006+A1:2010 apt.5.2.2	✓
Bottom stability	UNE-EN 14527:2006+A1:2010 apt.5.3.2	✓
Chemical resistance and stain resistance	UNE-EN 14527:2006+A1:2010 apt.5.3.3	✓
Resistance to temperature variations	UNE-EN 14527:2006+A1:2010 apt.5.3.4/HDT > 110°	✓
Slip resistance value	UNE-ENV 12633:2003 (clase 3)	✓
Determination of the critical angle of slip	DIN 51097:1992 (clase C)	✓
Compression resistance (MPa)	ASTM D695-15	✓

PROPIEDADES



100% waterproof
(Absorption <0.01%)
Non-porous



Resistant to sudden
temperature
changes



Anti-slip
Grade 3



High resistance
to scratches, impacts,
and abrasion



Easy and fast
installation
Easy to cut and
repair



Resistance to stains
and chemical agents
Easier cleaning



Comfortable to
the touch
Retains heat



Antibacterial Prevents
the appearance
of fungus and
bacterial cultures



Promotes low
water
consumption



UV-resistant
Noise reduction



Environmentally friendly
wood/cardboard
packaging



Eco-friendly
compliant
with CE regulations
(REACH)

STANDARD COLOURS



Blanco
RAL 9003

ZOOM / TEXTURE



*Due to different production processes, the final product may have slight variations in color and dimensions.





www.docciaagroup.com

MODEL

Pomez ST

 **Doccia Group®**